



# **FLAV-R-SAVOR®** TALL DRY HOLDING CABINETS

Models PFST-1X, PFST-2X

Hatco has a profitable way to build sales volume with the Flav-R-Savor Tall Dry Holding Cabinet. Heat is diffused throughout the cabinet providing gentle, even heat while maintaining optimum serving temperatures. Even after the door is opened and closed, the cabinet temperature quickly recovers so product stays hot.

## **FLEXIBILITY**

The Hatco Flav-R-Savor PFST series has an eight-shelf rack with 5" (127 mm) centers that can hold up to 16 *boxed* pizzas or eight *bagged* pizzas. Available in one- and two-door models with a heavy-duty caster cart for easy portability, tempered glass sides for excellent visibility assuring proper delivery rotation, a temperature control to regulate the heat, and a monitor to indicate cabinet temperature.

## **QUALITY**

The following features assure the finest performance for years to come:

- Heat is diffused throughout cabinet, providing even and gentle heat while maintaining optimum serving temperatures.
- The holding cabinet features tempered glass sides for full-view display.



Model PFST-2X  
with 8-shelf rack

METAL SHEATHED AIR HEATING ELEMENTS  
GUARANTEED AGAINST BURNOUT AND BREAKAGE  
FOR TWO YEARS.



**HATCO CORPORATION** P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.  
(800) 558-0607 • (414) 671-6350 • Fax (800) 543-7521 • Int'l. Fax (414) 671-3976  
[www.hatcocorp.com](http://www.hatcocorp.com) • E-mail: [equipsales@hatcocorp.com](mailto:equipsales@hatcocorp.com)


Form No. PFST-1006(S)

Printed in U.S.A.



# FLAV-R-SAVOR® TALL DRY HOLDING CABINETS

Models PFST-1X, PFST-2X

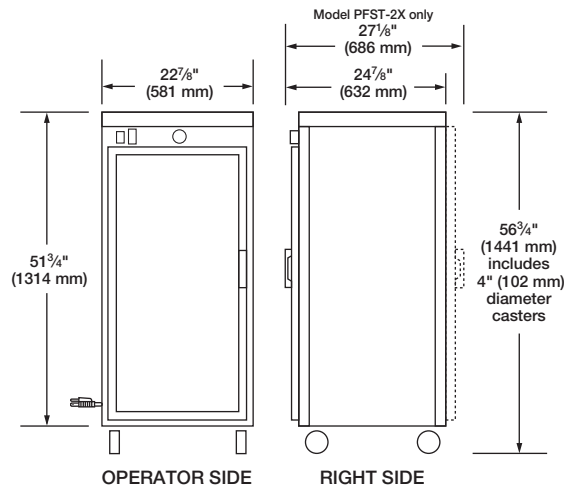

## SPECIFICATIONS

| Model   | Type    | Shipping Weight  |
|---------|---------|------------------|
| PFST-1X | 1 Door  | 178 lbs. (81 kg) |
| PFST-2X | 2 Doors | 178 lbs. (81 kg) |

## DIMENSIONS

PFST-1X: 22<sup>7</sup>/<sub>8</sub>"W x 24<sup>7</sup>/<sub>8</sub>"D x 56<sup>3</sup>/<sub>4</sub>"H (with caster cart)  
(581 x 632 x 1441 mm).

PFST-2X: 22<sup>7</sup>/<sub>8</sub>"W x 27<sup>1</sup>/<sub>8</sub>"D x 56<sup>3</sup>/<sub>4</sub>"H (with caster cart)  
(581 x 686 x 1441 mm).

Cabinet Opening: 18<sup>3</sup>/<sub>4</sub>"W x 40<sup>1</sup>/<sub>2</sub>"H (476 x 1029 mm).

Available Shelf Space: 17<sup>7</sup>/<sub>8</sub>"W x 17<sup>7</sup>/<sub>8</sub>"D (454 x 454 mm).

## VOLTAGE


120 volts, 1740 watts, 14.5 amps (uses NEMA 5-15P,  
NEMA 5-20P – Canada).

220 volts, 50/60 Hz, 1720 watts, 7.8 amps  
(uses CEE 7/7 Schuko plug configuration).


## CORD LOCATION

Facing controls, left-hand side panel, bottom right corner.

## PLUG CONFIGURATIONS



## Display Rack



**8-Shelf Multi-Purpose Rack**  
Rack Opening: 4<sup>5</sup>/<sub>8</sub>" (117 mm)

## PRODUCT SPECS

### Tall Dry Holding Cabinet

The Tall Dry Holding Cabinet shall be a Flav-R-Savor® Model  
....rated at ....volts and ....watts, as manufactured by the Hatco  
Corporation, Milwaukee, WI 53234 U.S.A.

The cabinet shall have ....door(s), tempered glass sides,  
stationary rack, and incandescent display lights. It shall include  
a temperature selector dial, on-off switch, and indicating lights.  
A 6' (1829 mm) cord with plug shall be attached.