

Scotsman®

BARLINE 5 系列

全自动制冰机

BL 105

BL 75


BL 55

BL 45


BL 25



方块冰
2.22X2.22X2.22(cm)

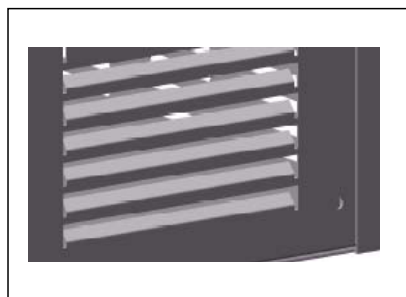

环氧树脂喷粉外壳

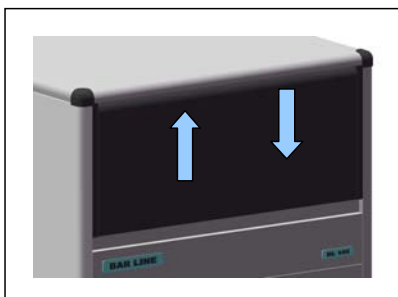

垂直式开门



含指示灯的PC板

型号	冷凝方式	产冰量		储冰量		电源类型	外形尺寸		含腿高度		制冷剂
		[kg]	[lbs]	[kg]	[lbs]	[V/Hz/ph]	[HxWxD mm]	[HxWxD inches]	[H mm]	[H inches]	
BL 105	风冷	100*	222	38	84	230/50/1	999x675x670	39-21/64"x26-37/64"x26-3/8"	1129	44-29/37"	R134a
BL 75	风冷	75*	167	38	84	230/50/1	999x675x670	39-21/64"x26-37/64"x26-3/8"	1129	44-29/37"	R134a
BL 55	风冷	50*	111	20	44	230/50/1	735x675x580	28-60/64"x26-37/64"x22-54/64"	865	34-1/16"	R134a
BL 45	风冷	40*	89	20	44	230/50/1	735x675x580	28-60/64"x26-37/64"x22-54/64"	865	34-1/16"	R134a
BL 25	风冷	25*	56	14	31	230/50/1	735x478x580	28-60/64"x18-53/64"x22-54/64"	865	34-1/16"	R134a

*在10℃(50°F)水温/10℃(50°F)室温条件下。

另有高度为30mm的调节腿,适用于制冰机放置在工作台下。

注:

本公司保留对产品型号及规格进行变更的权利且无需事先通知。


中国上海市徐虹中路20号2号楼2503室
Room 2503, Building 2, No. 20 Xuhong
Middle Rd., Xuhui District, Shanghai
China, 200235

Tel:021-61313200
Fax:021-61313330
E-mail:sales@scotsman-china.com





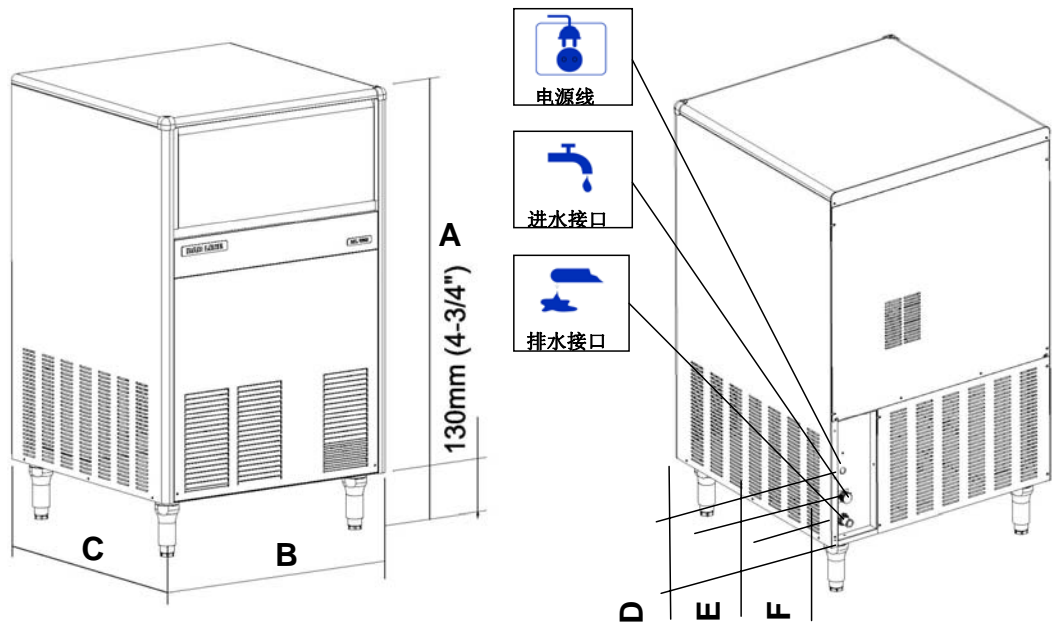




www.scotsman-china.com

Scotsman®

99040403 Ver: 2008/11



单位:mm

型号	外形尺寸					外接电源、进/出水接口尺寸							
	高(不含腿)-A		宽-B	深-C		电源线-D		进水口-E		排水口-F			
BL 105	999		675	670		190			120		55		
BL 75	999			580									
BL 55	735												
BL 45	735												
BL 25	735		478										
													
型号	冷凝方式	压缩机功率		电源线	功率	保险丝	耗电量	耗水量		净重		毛重	
		[BTU/h]	[W]	[Ømm ²]	[W]	[A]	[KW/h]	[l/h]	[gal/h]	[kg]	[lbs]	[kg]	[lbs]
BL 105	风冷	7800	2287	3 X 1.5	850	16	16.5	10	2.6	81	180	93	207
BL 75	风冷	5350	1350	3 X 1.5	670	16	12.0	7	1.8	75	168	87	194
BL 55	风冷	4235	1245	3 X 1.5	500	16	11.0	6.5	1.7	52	116	62	138
BL 45	风冷	4235	1245	3 X 1.5	500	16	10.0	6	1.6	50	111	60	133
BL 25	风冷	2287	672	3 X 1.5	340	16	6.5	4.6	1.2	43	95.6	52	115

BL105 产冰量

°F	90°	70°	60°	50°
°C	32°	21°	15°	10°
50°	195	208	217	226
10°	88	94	98	102
70°	186	202	208	217
21°	84	91	94	98
90°	182	197	204	213
32°	82	89	92	96
100°	153	166	173	184
38°	69	75	78	83

室温

BL75 产冰量

°F	90°	70°	60°	50°
°C	32°	21°	15°	10°
50°	146	156	163	170
10°	66	70.5	73.5	76.5
70°	140	151	156	163
21°	63	68.25	70.5	73.5
90°	136	148	153	160
32°	61.5	66.75	69	72
100°	115	125	130	138
38°	51.75	56.25	58.5	62.25

室温

BL55 产冰量

°F	90°	70°	60°	50°
°C	32°	21°	15°	10°
50°	88	100	102	111
10°	40	45	46.25	50
70°	77	88	94	100
21°	35	39.75	42.5	45
90°	63	76	83	88
32°	28.75	34.38	37.5	40
100°	47	63	72	80
38°	21.25	28.75	32.5	36.25

室温

BL45 产冰量

°F	90°	70°	60°	50°
°C	32°	21°	15°	10°
50°	71	80	82	88
10°	32	36	37	40
70°	62	70	75	80
21°	28	31.8	34	36
90°	51	61	66	71
32°	23	27.5	30	32
100°	37	51	57	64
38°	17	23	26	29

室温

BL25 产冰量

°F	90°	70°	60°	50°
°C	32°	21°	15°	10°
50°	44	52	55	58
10°	20	23.5	24.8	25.5
70°	40	48	53	55
21°	18	22	24	25
90°	32	37	40	43
32°	14.5	17	18.2	19.6
100°	30	34	37	40
38°	13.6	15.5	16.8	18

室温

制冰机使用环境要求

最小值	最大值
10°C(50°F)	40°C(104°F)
5°C(41°F)	35°C(95°F)
-10%	+10%
1BAR 14psi	5BAR 70psi

注:请使用制冰机背面铭牌上规定的电源种类和限值范围内的电压.如果使用不正确的电源导致的机器损坏,本公司概不负责.