

High Speed Grill Panini





The Electrolux HSG Panini Grill is the fastest sandwich grill in the world. Using breakthrough Microwaves in combination with the infrared technology, cooking times can be reduced up to 6 times compared to a standard panini grill while delivering superior sandwich quality. Combining simultaneously infrared radiation, contact plates and microwaves you can perfectly toast and warm up the core of your favourite panini for a Great Tasting, Hot and Crispy Sandwich in less than 60 seconds.*

*Depending on the cooking mass



CONSTRUCTION

- AISI 304 S/S lid and top plate.
- AISI 430 S/S back cover and galvanized steel bottom cover.
- Painted steel side panels.
- Aluminum ribbed top contact plate (215 x 215 mm) treated with special non-stick coating.
- Self adjusting top plate to grill sandwiches from 10 up to 75 mm thick.
- Smooth 4 mm thick quartz glass bottom cooking surface (250 x 250 mm).
- Independent temperature setting of the top and bottom plates from 150 to 250 °C (top) and from 150 to 280 °C (bottom).
- Automatic holding and opening system controlled by an electromagnet.
- Automatic lifting of the lid at the end of the cooking cycle via gas spring.
- Electronic control with digital LED display.
- Countdown display and buzzer at the end of the cycle.
- 2 temperature probes for an independent control of the top and bottom temperature.
- 900 W MICA heating element on the top plate
- 900 W electrical armored heating elements on the bottom plate.
- 2 x 900 W magnetrons for microwave
- Side louvres for efficient cooling ventilation.
- Ergonomic aluminum handle with plastic grip.
- Removable top front panel and dismountable top cooking plate for better cleanability.
- 4 pre-loaded programs (default parameters)
 - P1 tot.time = 30 sec. (20 sec. microwaves)
 - P2 tot time = 40 sec. (30 sec. microwaves)
 - P3 tot time = 50 sec. (40 sec. microwaves)
 - P4 tot time = 59 sec. (no microwaves)
- The 4 pre set programs can be adjusted by the user. The programmable parameters are:
 - Top plate temperature (trt)
 - Bottom plate temperature (trb)
 - Total duration of each cycle (tCYx)
 - Duration of microwaves within each cycles (tW)
- Beside the included accessories listed in the next page, the unit includes 1 lt of detergent.
- Upon installation, the tube can be adjusted in any one of the 4 fixed positions available (only on adjustable tube models).

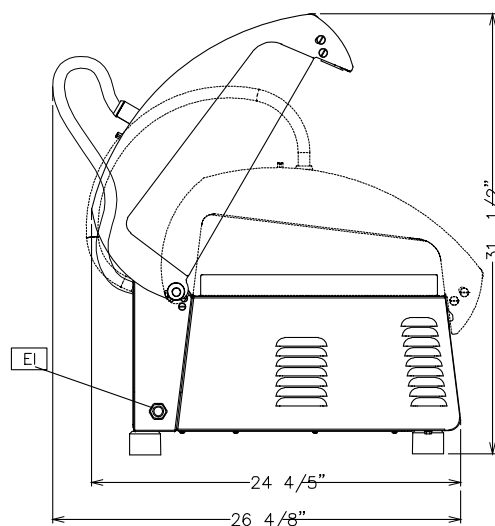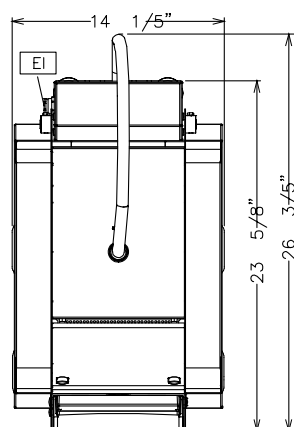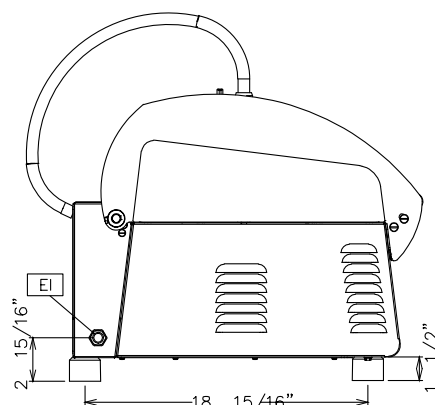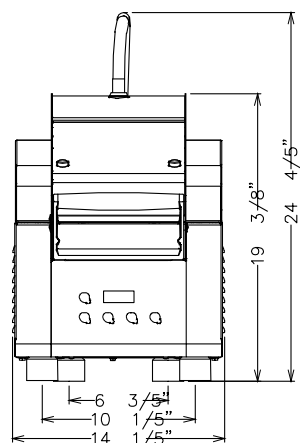

HSG Panini

PA0001_Copy2 High Speed Grill Panini

	HSPPEU 603601	HSPPEUT 603697	HSGEUAT 603699	HSG1PH 603731
LEGEND				
EI - Electrical connection	400 V, 3N, 50	400 V, 3N, 50	400 V, 3N, 50	230 V, 1, 50
TECHNICAL DATA				
External dimensions - mm				
width	361	361	361	361
depth	675	675	675	675
height	630	630	630	630
Top cooking plate dimension - mm	215 x 215	215 x 215	215 x 215	215 x 215
Bottom cooking plate dimension (net) - mm	215 x 215	215 x 215	215 x 215	215 x 215
Total installed power - kW	5	5	5	5
Microwave power - kW	1,8	1,8	1,8	1,8
Net weight - kg.	36	36	36	36
Supply voltage	400 V, 3N, 50	400 V, 3N, 50	400 V, 3N, 50	230 V, 1, 50
Tube type	Regular	Short	Adjustable	Adjustable
INCLUDED ACCESSORIES				
CLEANING BRUSH FOR HSG PANINI	1	1	1	1
GLASS SAVER FOR HSG PANINI	1	1	1	1
SET OF 24 BAKING PAPER SHEETS-HSG PANINI	1	1	1	1
SPATULA FOR HSG PANINI	1	1	1	1
SPECIAL SCRAPER FOR HSG PANINI	1	1	1	1
SPRAY BOTTLE(0.5L)FOR DETERG.-HSG PANINI	1	1	1	1
ACCESSORIES				
4x1LT DETERG."GREASE EXPRESS"-HSG PANINI	653624	653624	653624	653624
CLEANING BRUSH FOR HSG PANINI	653623	653623	653623	653623
GLASS SAVER FOR HSG PANINI	653527	653527	653527	653527
HSG SIDE PROTECTION SHIELD FOR SIDE VENT	653693	653693	653693	653693
HSG SPACER STOP KIT FOR REAR/SIDE VENTIL	653692	653692	653692	653692
SET OF 24 BAKING PAPER SHEETS-HSG PANINI	653694	653694	653694	653694
SPATULA FOR HSG PANINI	653625	653625	653625	653625
SPECIAL SCRAPER FOR HSG PANINI	653690	653690	653690	653690
SPRAY BOTTLE(0.5L)FOR DETERG.-HSG PANINI	653695	653695	653695	653695

2013-10-03

Subject to change without notice